

SYSTEM DATA SHEET

Sikafloor® PurCem® HS-21

SELF-SMOOTHING, MEDIUM TO HEAVY DUTY, MATT FINISH POLYURETHANE CEMENT HYBRID FLOORING SYSTEM

DESCRIPTION

Sikafloor® PurCem® HS-21 system is made with polyurethane cement technology and is part of the Sikafloor® PurCem® flooring range. The Sikafloor® PurCem® HS-21 system is especially designed to withstand chemical attack, high impact and can be used in wet and dry processing plants.

The system is composed of an highly durable polyurethane cement body coat, it has an aesthetic, easy to clean and smooth surface, providing medium slip resistance. Is typically installed at 4 to 6 mm thick.

USES

Sikafloor® PurCem® HS-21 may only be used by experienced professionals.

- Food processing plants, in wet or dry process areas, freezers and coolers, thermal shock areas
- Chemical plants
- Laboratories
- Workshops

CHARACTERISTICS / ADVANTAGES

- High chemical resistance. Resists a wide range of organic and inorganic acids, alkalis, amines, salts and solvents
- Good resistance to fire
- High mechanical and abrasion resistance
- Easy application
- Easy to clean and maintain
- Seamless, non taint, odourless
- Smooth, matt surface
- Tolerant to moisture in the substrate
- Very good life cycle cost performance

SUSTAINABILITY

- VOC emission certificate according to AgBB und DIBt approval requirements, Eurofins, 4.1.2012
- VOC emission certificate class A+ according to French

regulation, Eurofins, 22.06.2012

APPROVALS / CERTIFICATES

- Screed material for floor screeds according to EN 13813: 2002, Declaration of Performance 02 08 02 001 0 000002 1088, certified by notified factory production control body 0086, certificate of conformity of the factory production control 541325, and provided with the CE-marking.
- Surface protection coating for concrete according to EN 1504-2:2004, Declaration of Performance 02 08 02 02 001 0 000002 1088, certified by notified factory production control body 0086, certificate of conformity of the factory production control 541325, and provided with the CE-marking.
- Conforms to the requirements of: EN1186, EN 13130, prCEN/TS 14234 and the Decree on Consumer Goods, representing the conversion of directives 89/109/EEC, 90/128/EEC and 2002/72/EC for contact with food stuffs. Test report by ISEGA, 32758 U11 and 32759 U11, both dated December 6th, 2011.
- Certified as suitable for use in food and beverage facilities that operate in accordance with a HACCP based Food Safety Programme.
- Compliant with USDA flooring requirements
- Canadian Food Inspection Agency acceptance for use in food plants in Canada.
- British Standards Specifications (BSS) acceptance for use in the UK. Campden and Chorleywood Food Research Association, Ref. S/REP/125424/1a and 2a, dated 8th February, 2012
- Fire classification report according to EN 13501-1 from Exova Warrington Fire for Sikafloor®-21 PurCem® No.317047, dated 24th of March, 2012
- Liquid water transmission rate test report from the Technology Centre, Ref. 15456 dated January 25th, 2012
- Abrasion resistance tests performed by Face Consultants Ltd., according to BS 8204-2:2003, report ref. FC/12/3850, dated January 17th, 2012. (Tests performed on Sikafloor® -20/21 PurCem®)


- Impact resistance values tested at PRA, Ref. No. 75221-151, dated January 11th, 2012
- Slip resistance properties according to DIN 51130 tested at MPI (Materialprüfung und Entwicklung), test reports refs. No. 12-6639-S/12 and 12-6641-S/12, dated August 7th, 2012.

PRODUCT INFORMATION

| | |
|---------------------------|---|
| Packaging | Please refer to the individual Product Data Sheet |
| Shelf life | Please refer to the individual Product Data Sheet |
| Storage conditions | Please refer to the individual Product Data Sheet |

SYSTEMS

System Structure Sikafloor® PurCem® HS-21

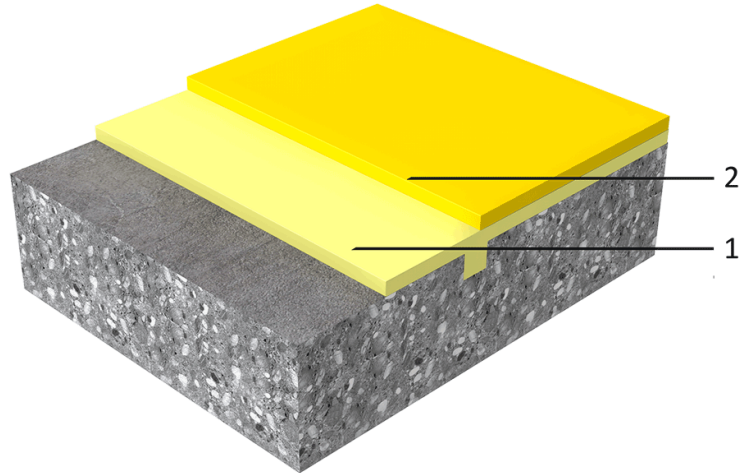

| Layer | Product |
|-----------------|-----------------------|
| 1. Scratch coat | Sikafloor®-21 PurCem® |
| 2. Body coat | Sikafloor®-21 PurCem® |

As optional primers Sikafloor® -156/-161 + quartz sand 0.4–0.8 mm broadcast to excess can be used. Please refer to the individual Product Data Sheet.

| | |
|--|---|
| Composition | Water-based polyurethane cement hybrid |
| Appearance | Smooth surface, matt finish |
| Colour | Beige, Maize Yellow, Oxide Red, Sky Blue, Grass Green, Pebble Grey, Light Grey, Dusty Grey, Agate Grey |
| Nominal Thickness | ~ 4-6 mm |
| Volatile organic compound (VOC) content | Very low content of volatile organic compounds, it fulfils the stringent demands for indoor air quality and low VOC emitting products AgBB. |

TECHNICAL INFORMATION

| | | |
|-----------------------------|--|-------------------|
| Water Absorption | <0.10 % | (ASTM C 413) |
| Abrasion Resistance | Class "Special" Severe abrasion resistance | (BS 8204 Part 2) |
| | AR 0.5 | (EN 13892-4) |
| | Class A6 | (EN 13892-3) |
| | <900 mg (H-22/1000/1000) | (ASTM D 4060-01) |
| Resistance to Impact | Class III (≥ 20Nm) | (ISO 6272) |
| | 2 pounds/30 inches (3 mm thick) | (ASTM D 2784) |
| Indentation | 0 | (MIL – PFR 24613) |

| Compressive Strength | >50 N/mm ² after 28 days at +23°C / 50% r.h. | (BS EN 13892-2) | | | | | | |
|----------------------------------|---|-------------------|---------|-------------------|------------------|---------------|--|--|
| Tensile Adhesion Strength | > 2.0 N/mm ² | (EN1542) | | | | | | |
| Reaction to Fire | Bfl-s1 | (EN 13501-1) | | | | | | |
| Chemical Resistance | Please refer to Sikafloor® PurCem® chemical resistance guide. Contact Sika technical service for specific information. | | | | | | | |
| Temperature Resistance | <table border="1"> <tr> <th>4 mm</th> <th>6 mm</th> </tr> <tr> <td>-15 °C to +70 °C</td> <td>-25 °C to +70 °C</td> </tr> </table> | 4 mm | 6 mm | -15 °C to +70 °C | -25 °C to +70 °C | | | |
| 4 mm | 6 mm | | | | | | | |
| -15 °C to +70 °C | -25 °C to +70 °C | | | | | | | |
| | The product is resistant to short term contact with temperatures of +90°C, mainly during the cleaning regimes. | | | | | | | |
| Capillary Absorption | < 0.002 kg/(m ² ×h ^{0.5}) | (EN 1062-3) | | | | | | |
| USGBC LEED Rating | Conforms Section EQ (Indoor Environmental Quality), Credit 4.2 Low-Emitting Materials Paints and Coatings. Calculated VOC content ≤ 50 g/l | | | | | | | |
| Coefficient of Friction | <table border="1"> <tr> <td>Rubber:</td> <td>0.5</td> <td>(ASTM D 1894-61T)</td> </tr> <tr> <td>Steel:</td> <td>0.3</td> <td></td> </tr> </table> | Rubber: | 0.5 | (ASTM D 1894-61T) | Steel: | 0.3 | | |
| Rubber: | 0.5 | (ASTM D 1894-61T) | | | | | | |
| Steel: | 0.3 | | | | | | | |
| Skid / Slip Resistance | R 10 | (DIN 51130) | | | | | | |
| | <table border="1"> <tr> <th>SRV Dry</th> <th>SRV Wet</th> </tr> <tr> <td>70</td> <td>60</td> </tr> </table> | SRV Dry | SRV Wet | 70 | 60 | (EN 13036- 4) | | |
| SRV Dry | SRV Wet | | | | | | | |
| 70 | 60 | | | | | | | |

APPLICATION INFORMATION

| Consumption | <table border="1"> <thead> <tr> <th>Layer</th> <th>Product</th> <th>Consumption</th> </tr> </thead> <tbody> <tr> <td>1. Scratch coat</td> <td>Sikafloor®-21 PurCem®</td> <td>~3.0 kg/m² (1.5 mm)</td> </tr> <tr> <td>2. Body coat</td> <td>Sikafloor®-21 PurCem®</td> <td>~1.9 kg/m²/mm</td> </tr> </tbody> </table> | Layer | Product | Consumption | 1. Scratch coat | Sikafloor®-21 PurCem® | ~3.0 kg/m ² (1.5 mm) | 2. Body coat | Sikafloor®-21 PurCem® | ~1.9 kg/m ² /mm | | | | | | | | |
|--------------------------------------|--|---------------------------------|--------------|---------------|-----------------|-----------------------|---------------------------------|--------------|-----------------------|----------------------------|-----------|-----------|---------|--------|----------|-----------|-----------|--|
| Layer | Product | Consumption | | | | | | | | | | | | | | | | |
| 1. Scratch coat | Sikafloor®-21 PurCem® | ~3.0 kg/m ² (1.5 mm) | | | | | | | | | | | | | | | | |
| 2. Body coat | Sikafloor®-21 PurCem® | ~1.9 kg/m ² /mm | | | | | | | | | | | | | | | | |
| | Consumptions are theoretical and do not include any wastage, additional material need due to porosity, substrate profile etc. | | | | | | | | | | | | | | | | | |
| Product Temperature | Please refer to the individual Product Data Sheet | | | | | | | | | | | | | | | | | |
| Ambient Air Temperature | +10 °C min / +40 °C max | | | | | | | | | | | | | | | | | |
| Relative Air Humidity | 80 % max | | | | | | | | | | | | | | | | | |
| Dew Point | Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or other disturbance of the surface on the floor finish. | | | | | | | | | | | | | | | | | |
| Substrate Temperature | +10 °C min / +40 °C max | | | | | | | | | | | | | | | | | |
| Substrate Moisture Content | Sikafloor® PurCem® HS-21 can be installed on substrates with higher moisture content. The substrate needs to be visibly dry and have an adequate pull-off strength min 1.5 N/mm ² . No ponding water. Check for rising moisture. | | | | | | | | | | | | | | | | | |
| Applied Product Ready for Use | <table border="1"> <thead> <tr> <th>Temperature</th> <th>Foot traffic</th> <th>Light traffic</th> <th>Full cure</th> </tr> </thead> <tbody> <tr> <td>+10 °C</td> <td>~20 hours</td> <td>~34 hours</td> <td>~7 days</td> </tr> <tr> <td>+20 °C</td> <td>~12 hours</td> <td>~16 hours</td> <td>~4 days</td> </tr> <tr> <td>+30 °C</td> <td>~8 hours</td> <td>~14 hours</td> <td>~3–4 days</td> </tr> </tbody> </table> | Temperature | Foot traffic | Light traffic | Full cure | +10 °C | ~20 hours | ~34 hours | ~7 days | +20 °C | ~12 hours | ~16 hours | ~4 days | +30 °C | ~8 hours | ~14 hours | ~3–4 days | |
| Temperature | Foot traffic | Light traffic | Full cure | | | | | | | | | | | | | | | |
| +10 °C | ~20 hours | ~34 hours | ~7 days | | | | | | | | | | | | | | | |
| +20 °C | ~12 hours | ~16 hours | ~4 days | | | | | | | | | | | | | | | |
| +30 °C | ~8 hours | ~14 hours | ~3–4 days | | | | | | | | | | | | | | | |
| | Note: Times are approximate and will be affected by changing ambient conditions and substrate conditions | | | | | | | | | | | | | | | | | |

MAINTENANCE

CLEANING

Please refer to Sikafloor®- Cleaning Regime.

FURTHER INFORMATION

Please refer to:

- Sikafloor® PurCem® Method Statement
- Sika® Method Statement Mixing and Application of Flooring Systems
- Sika® Method Statement Surface Evaluation & Preparation
- Sikafloor® PurCem® Product Data Sheets

IMPORTANT CONSIDERATIONS

- Do not apply to PCC (polymer modified cement mortars) that may expand due to moisture when sealed with an impervious resin.
- Always ensure good ventilation when using Sikafloor® PurCem® products in a confined space, to prevent excessive ambient humidity.
- Freshly applied Sikafloor® PurCem® products, must be protected from damp, condensation and direct water contact (rain) for at least 24 hours.
- Protect the substrate during application from condensation from pipes or any overhead leaks.
- Do not apply to cracked or unsound substrates.
- Always allow a minimum of 48 hours after product application prior to placing into service in proximity with food stuffs.
- Products of the Sikafloor® PurCem® product range are subject to discolouration when exposed to UV radiation.
- Extent depends on colour. There are no measurable losses of any properties when this occurs and it is a purely aesthetical matter.
- Products can be used outside provided the change in appearance is acceptable by the customer. In some slow curing conditions, soiling of the surface may occur when opened to foot traffic, even though mechanical properties have been achieved. It is advised to remove dirt using a dry mop or cloth. Avoid scrubbing with water for the first three days.

BASIS OF PRODUCT DATA


All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

Sika Italia S.p.A.

Via Luigi Einaudi, 6
20068 Peschiera Borromeo (MI)
Phone: +39 02 54778 111
Fax: +39 02 54778 119
info@sika.it
www.sika.it



SYSTEM DATA SHEET
Sikafloor® PurCem® HS-21
July 2017, Version 02.01
020814900000000008

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SikafloorPurCemHS-21-en-IT-(07-2017)-2-1.pdf