

---

# Sikacryl<sup>®</sup>-620 Fire

---

## DECLARATION OF PERFORMANCE

### No. 87039029

---

<b>1</b>	<b>UNIQUE IDENTIFICATION CODE OF THE PRODUCT-TYPE:</b>	87039029
<b>2</b>	<b>INTENDED USE/S</b>	EN 15651-1:2012 Sealants for interior application F INT
<b>3</b>	<b>MANUFACTURER:</b>	Sika Services AG Tüffenwies 16-22 8064 Zürich
<b>4</b>	<b>AUTHORISED REPRESENTATIVE:</b>	
<b>5</b>	<b>SYSTEM/S OF AVCP:</b>	System 4
<b>6a</b>	<b>HARMONISED STANDARD:</b>	EN 15651-1:2012
	Notified body/ies:	No Notified Body required

#### Declaration of Performance

Sikacryl<sup>®</sup>-620 Fire  
87039029  
2017.10 , ver. 1  
1213

**7 DECLARED PERFORMANCE/S**

Essential Characteristics	Performance	AVCP	Harmonised Technical Specification
Reaction to fire	NPD		
Release of chemicals dangerous to the environment and health	NPD		
Water tightness and air tightness			
Resistance to flow	≤ 5 mm	System 4	
Loss of volume	≤ 45 %	System 4	EN 15651-1:2012
Tensile properties (i.e. elongation) at break at 23 °C	≥ 25 %	System 4	
Durability	Pass	System 4	

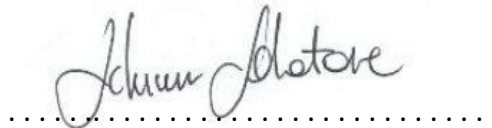
**8 APPROPRIATE TECHNICAL DOCUMENTATION AND/OR - SPECIFIC TECHNICAL DOCUMENTATION**

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Name : Michele Stella  
 Function: PE Sealing & Bonding At  
 Peschiera Borromeo on 27 August 2019

Name : Salvatore Schirinzi  
 Function: General Manager  
 Peschiera Borromeo on 27 August 2019

End of information as required by Regulation (EU) No 305/2011

**RELATED DECLARATION OF PERFORMANCE**

Product Name	Harmonised technical specification	DoP Number
Sikacryl®-620 Fire	ETAG 026 - part 3:2011	12725641

**Declaration of Performance**

Sikacryl®-620 Fire  
 87039029  
 2017.10 , ver. 1  
 1213





14

Sika Services AG, Zurich, Switzerland

DoP No. 87039029

EN 15651-1:2012

No Notified Body required

Sealants for interior application F INT

Water tightness and air tightness

Resistance to flow  $\leq 5$  mm

Loss of volume  $\leq 45$  %

Tensile properties (i.e. elongation) at break at 23 °C  $\geq 25$  %

Durability Pass

<http://dop.sika.com>

## ECOLOGY, HEALTH AND SAFETY INFORMATION (REACH)

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

## LEGAL NOTE

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sikas recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the products suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### Declaration of Performance

Sikacryl®-620 Fire  
87039029  
2017.10 , ver. 1  
1213

**Sika Services AG**  
Tüffenwies 16-22  
8064 Zürich  
Switzerland  
[www.sika.com](http://www.sika.com)

**Declaration of Performance**

Sikacryl®-620 Fire  
87039029  
2017.10 , ver. 1  
1213

**4/4**

**BUILDING TRUST**

