

## SYSTEM DATA SHEET

# Sikafloor® Pronto RB-25

ELASTOMERIC, FAST CURING, WATERPROOFING SYSTEM FOR FLOORING APPLICATIONS

### DESCRIPTION

Sikafloor® Pronto RB-25 is a slip resistant, fast curing, elastomeric, waterproofing, coloured floor covering based on reactive acrylic resins.

### USES

Sikafloor® Pronto RB-25 may only be used by experienced professionals.

- For indoor and outdoor trafficable, slip resistant wearing layers for multi-storey and underground car-parks, top and intermediate decks, turning areas and ramps
- Suitable for flooring applications in the beverage and food industry

### CHARACTERISTICS / ADVANTAGES

- Elastomeric
- Waterproof
- Fast curing
- High abrasion resistance
- Good mechanical and chemical resistance

### APPROVALS / CERTIFICATES


- Dynamic crack-bridging classification B 3.2 (+23 °C) according to DIN EN 1062-7 part of EN 1504, Report No. P 10016-1-E, KIWA Polymer Institute, Germany, January 2016.
- Static crack-bridging classification, A2 (>250 µm) at 0 °C according to DIN EN 1062-7 part of EN 1504, Report No. P 10016-3-E, KIWA Polymer Institute, Germany, February 2016.
- Static crack-bridging classification, A3 (>500 µm) at +23 °C according to DIN EN 1062-7 part of EN 1504, Report No. P 10016-2-E, KIWA Polymer Institute, Germany, February 2016.

## PRODUCT INFORMATION

Packaging	Please refer to the individual product data sheets
Shelf life	Please refer to the individual product data sheets
Storage conditions	Please refer to the individual product data sheets


## SYSTEMS

### System Structure

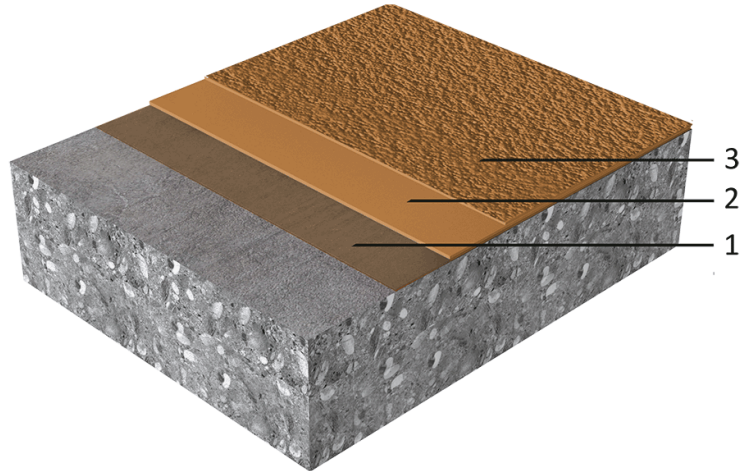

#### Sikafloor® Pronto RB-25 system (~3–5 mm) / Application on horizontal surfaces

Layer	Product
1. Primer	Sikafloor®-10/-11/-13 Pronto
2. Wearing coat & broadcasting in excess	Sikafloor®-15 Pronto (filled 1:2 with Sikafloor® Pronto Filler) & quartz sand or coloured quartz sand (0.7–1.2 mm)
3. Top coat	Sikafloor®-18 Pronto

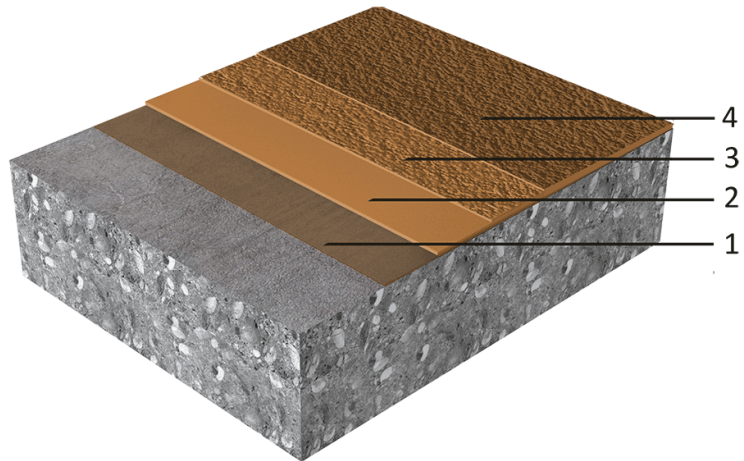

#### Sikafloor® Pronto RB-25 system (~3–5 mm) / Application on surfaces with inclination

Layer	Product
1. Primer	Sikafloor®-10/-11/-13 Pronto
2. Base coat & slight broadcasting	Sikafloor®-15 Pronto (unfilled) & quartz sand or coloured quartz sand (0.7–1.2 mm)
3. Wearing coat & broadcasting in excess	Sikafloor®-15 Pronto (unfilled) & quartz sand or coloured quartz sand (0.7–1.2 mm)
4. Top coat	Sikafloor®-18 Pronto

<b>Composition</b>	Reactive acrylic resins
<b>Appearance</b>	Slip resistant semi-gloss finish
<b>Colour</b>	According to the Sikafloor®-18 Pronto available colour shades RAL 7030, RAL 5010, RAL 5015.
<b>Nominal Thickness</b>	~3–5 mm

## TECHNICAL INFORMATION

<b>Crack Bridging Ability</b>	Static crack bridging	Class A2 (> 250 µm) at 0 °C	(DIN EN 1062-7)
	Static crack bridging	Class A3 (> 500 µm) at 23 °C	
	Dynamic crack bridging up to 0.3 mm	Class B 3.2 (+23 °C)	
<b>Chemical Resistance</b>	Please refer to the chemical resistance table of Sikafloor®-18 Pronto		
<b>Skid / Slip Resistance</b>	R11 V4		(DIN 51130)

## APPLICATION INFORMATION

<b>Consumption</b>			
<b>Sikafloor® Pronto RB-25 system (~3–5 mm) / Application on horizontal surfaces</b>			
<b>Coating System</b>	<b>Product</b>	<b>Consumption</b>	
Primer	1–2 × Sikafloor®-10/-11/-13 Pronto	1–2 × ~0.4-0.5 kg/m <sup>2</sup>	
Optional – Levelling Mortar (surface roughness up to 3 mm not included in the diagram)	Sikafloor®-11 Pronto (1 pbw) + Sikafloor® Pronto Filler (1.5-2.0 pbw) + 2 % Extender T	1.6 kg/m <sup>2</sup> /mm ( 0.6 kg part A +1 kg Sikafloor® Pronto Filler) + 2 % Extender T	
Wearing coat	Sikafloor®-15 Pronto (filled 1:2 with Sikafloor® Pronto Filler)	~3.6 kg/m <sup>2</sup>	
Broadcasting in excess	Quartz sand or coloured quartz sand (0.7–1.2 mm)	~4-6 kg/m <sup>2</sup>	
Top Coat	Sikafloor®-18 Pronto	1–2 × ~0.6-0.8 kg/m <sup>2</sup>	
<b>Sikafloor® Pronto RB-25 system (~3–5 mm) / Application on surfaces with 10–20 % inclination</b>			
<b>Coating System</b>	<b>Product</b>	<b>Consumption</b>	
Primer	1–2 x Sikafloor®-10/11/13 Pronto	1–2 × ~0.4-0.5 kg/m <sup>2</sup>	
Optional – Levelling Mortar (surface roughness up to 3 mm not included in the diagram)	Sikafloor®-11 Pronto (1 pbw) + Sikafloor® Pronto Filler (1.5-2.0 pbw) + 2 % Extender T	1.6 kg/m <sup>2</sup> /mm ( 0.6 kg part A +1 kg Sikafloor® Pronto Filler) + 2 % Extender T	
Base coat	Sikafloor®-15 Pronto (unfilled) + 0.5-1 % Extender T	~0.8 kg/m <sup>2</sup>	
Slightly broadcasting	Quartz Sand (0.7-1.2 mm)	~2 kg/m <sup>2</sup>	
Wearing coat	Sikafloor®-15 Pronto (unfilled) + 0.5-1 % Extender T	~0.8 kg/m <sup>2</sup>	
Broadcasting in excess	Quartz sand or coloured quartz sand (0.7-1.2 mm)	~2-3 kg/m <sup>2</sup>	
Top Coat	Sikafloor®-18 Pronto	1–2 × ~0.6-0.8 kg/m <sup>2</sup>	
<b>Product Temperature</b>	Please refer to the individual product data sheets		

<b>Ambient Air Temperature</b>	0 °C min. / +30 °C max.	
<b>Relative Air Humidity</b>	~ 80 % r.h. max.	
<b>Dew Point</b>	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.	
<b>Substrate Temperature</b>	0 °C min. / +30 °C max.	
<b>Substrate Moisture Content</b>	When performing application work with Sikafloor® Pronto RB-25, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).	
<b>Waiting Time / Overcoating</b>	Before applying Sikafloor®-15 Pronto on Sikafloor®-11/-13 Pronto allow:	
	<b>Substrate temperature</b>	<b>Minimum</b>
	+5 °C	50 min
	+10 °C	45 min
	+20 °C	40 min
	+30 °C	35 min
	Before applying Sikafloor®-15 Pronto on Sikafloor®-10 Pronto allow:	
	<b>Substrate temperature</b>	<b>Minimum</b>
	+5 °C	70 min
	+10 °C	50 min
	+20 °C	50 min
	+30 °C	35 min
Before applying Sikafloor®-18 Pronto on Sikafloor®-15 Pronto allow:		
<b>Substrate temperature</b>	<b>Minimum</b>	
+5 °C	80 min	
+10 °C	60 min	
+15 °C	50 min	
+20 °C	45 min	
+25 °C	35 min	
+30 °C	30 min	

<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Full traffic</b>
	0 °C	~50 min	~2 hours
	+10 °C	~50 min	~2 hours
	+20 °C	~40 min	~1 hour
	+20 °C	~30 min	~1 hour

## MAINTENANCE

### CLEANING

Please refer to the Method Statement Sikafloor® Cleaning Regime

### FURTHER INFORMATION

- Sika® Method Statement Mixing & Applications of Flooring systems
- Sika® Method Statement Evaluation and Preparation of Surfaces for Flooring systems

### IMPORTANT CONSIDERATIONS

- Freshly applied Sikafloor® Pronto RB-25 must be protected from damp, condensation and water for at least 1 hour.
- Use spark proof mixing equipment for internal applic-

ations.

- Always ensure good ventilation when using Sikafloor® Pronto RB-25 in a confined space.
- In order to ensure optimum curing during internal applications the air must be exchanged at least seven times per hour. During application and curing use a forced fresh air supply / exhausting of fumes with appropriate equipment (spark-free / explosion-proof).
- Systems based on reactive acrylic resins exhibit a characteristic odour during application and prior to achieving full cure, once fully cured they are taint free. All unpackaged goods should be removed from the area of the works during application. Do not apply in the presence of foodstuffs. Any foodstuffs, whether packaged or not, should be completely isolated from the flooring works during the application process and until the products are fully cured.
- For exact colour matching, ensure the Sika® Pronto Pigment in each area is applied from the same con-

trol batch number.

- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin. If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

## ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### Sika Italia S.p.A.

Via Luigi Einaudi, 6  
20068 Peschiera Borromeo (MI)  
Phone: +39 02 54778 111  
Fax: +39 02 54778 119  
info@sika.it  
www.sika.it



SYSTEM DATA SHEET  
Sikafloor® Pronto RB-25  
July 2017, Version 03.01  
020813900000000002

SikafloorProntoRB-25-en-IT-(07-2017)-3-1.pdf